


INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

# **PRIORITY DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)




I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

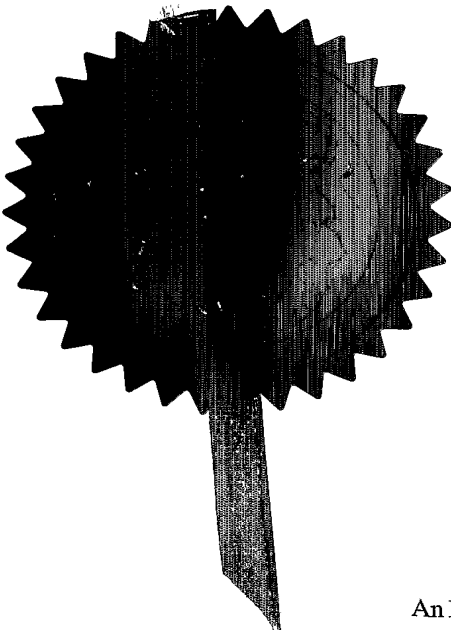


Signed

Dated

22 December 2004

Patents Form 1/77

Patents Act 1977  
(Rule 16)11DEC03 EBS/587-1 001091  
P01/7700 0.00-0328649.9 ACCOUNT CHA**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference **PFC 1683 GB**
2. Patent application number  
(The Patent Office will fill in this part) **0328649.9**
3. Full name, address and postcode of the or of each applicant (underline all surnames)  
**JOHNSON MATTHEY PUBLIC LIMITED COMPANY  
2-4 COCKSPUR STREET  
TRAFALGAR SQUARE  
LONDON SW1 5BQ**
- Patents ADP number (if you know it)
- If the applicant is a corporate body, give the country/state of its incorporation **GB 536268007**
4. Title of the invention **REFORMING CATALYST**
5. Name of your agent (if you have one) **IAN CARMICHAEL WISHART**
- "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)  
**JOHNSON MATTHEY TECHNOLOGY CENTRE  
BLOUNTS COURT  
SONNING COMMON  
READING RG4 9NH**
- Patents ADP number (if you know it) **399/411001**
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number
- | Country | Priority application number<br>(if you know it) | Date of filing<br>(day / month / year) |
|---------|---|--|
|         |   |  |
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application
- | Number of earlier application | Date of filing<br>(day / month / year) |
|-------------------------------|--|
|                               |  |
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (2)) **YES**

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

0

Description

8

Claim(s)

2

Abstract

1

Drawing(s)

0

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 2/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

ONE

11.

I/We request the grant of a patent on the basis of this application.

Signature

J C WISHART

Date 11 Dec 03

12. Name and daytime telephone number of person to contact in the United Kingdom

MRS F E STRANGE 0118 924 2125

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

PFC1683

DUPLICATE

1

### REFORMING CATALYST

The present invention relates to fuel reforming catalysts, catalysed components and fuel processing systems comprising the catalysts, and reforming processes using the catalysts.

Hydrogen is an important industrial gas and is used in a number of applications such as ammonia synthesis, methanol synthesis, chemical hydrogenations, metal manufacture, glass processing and fuel cells. Fuel processors produce hydrogen by reforming fuels such as methane, propane, methanol, ethanol, natural gas, liquefied petroleum gas (LPG), diesel and gasoline, and are used to provide hydrogen for a variety of applications, particularly for fuel cells. The reforming process produces a hydrogen-rich reformat stream that also comprises carbon dioxide, carbon monoxide and trace amounts of hydrocarbons or alcohols. Carbon monoxide is a severe poison for the catalysts in the anode of a fuel cell, so fuel processing systems generally comprise a fuel reformer and one or more carbon monoxide clean-up stages.


In a steam reforming process, water and fuel are combined to produce hydrogen and carbon dioxide, e.g. for methanol:




This process is endothermic, so steam reforming requires a continuous input of energy.

In an autothermal reforming process, both water and air are mixed with the fuel.

The process combines steam reforming and partial oxidation, e.g. for methanol:



The partial oxidation is exothermic, thus providing the heat for the endothermic steam reforming reaction. Another reaction which may take place within the autothermal reformer is the water gas shift reaction:



This is a particularly useful reaction because it reduces CO content and increases hydrogen content. Autothermal reforming processes are described in WO 96/00186.

PFC1683

2

Catalysts are used to promote the various reforming reactions. Generally the catalysts comprise metal particles deposited on ceramic support materials. A commonly used support material is  $\gamma\text{-Al}_2\text{O}_3$  due to its mechanical stability, moderately high surface area, resistance to sintering over a wide range of temperatures and high degree of metal dispersion that can be achieved. EP 1 157 968 discloses a catalyst for use in autothermal reforming reactions which contains rhodium and optionally platinum on an active aluminium oxide.

The present inventors have sought to provide an improved reforming catalyst. Desirably the catalyst should promote the reforming reactions over a wide temperature range and for a variety of fuels. The catalyst should be durable, i.e. the performance should not decrease significantly with time.

Accordingly the present invention provides a reforming catalyst comprising precious metal particles dispersed on a support material, wherein the support material comprises ceria, and characterised in that the support material further comprises magnesium aluminate and/or magnesium oxide.

The present inventors have found that the catalysts according to the invention have improved performance when compared to catalysts comprising state-of-the-art support materials.

The magnesium aluminate is suitably a crystalline compound with the spinel structure and the formula  $\text{MgAl}_2\text{O}_4$ . The magnesium oxide is suitably a crystalline compound with the periclase structure. Suitably the support material contains at least 20wt% magnesium aluminate and/or magnesium oxide, and preferably at least 35wt% magnesium aluminate and/or magnesium oxide, compared to the total mass of the support material.

In a preferred embodiment, the support material comprises both magnesium aluminate and magnesium oxide, and the molar ratio of magnesium aluminate to magnesium oxide is suitably between 15:1 and 1:15, preferably between 12:1 and 1:6. In a particularly preferred embodiment, the support material is made by a process wherein

PFC1683

3

aluminium magnesium hydroxycarbonate is calcined to form a mixture of magnesium oxide and magnesium aluminate. In this embodiment, the magnesium aluminate and magnesium oxide are intimately mixed. Suitably the combined mass of magnesium aluminate and magnesium oxide is 40-90wt% compared to the total mass of the support material.

Preferably the support material further comprises zirconia. The loading of ceria and zirconia (i.e. the combined mass of the ceria and the zirconia as a percentage of the total mass of the support material) is suitably 10-60wt%, preferably 25-60wt%. The ceria and zirconia may be present as regions of ceria, regions of zirconia and/or regions of mixed ceria-zirconia oxide. It is preferred that the majority of the ceria and zirconia is present as the mixed oxide. The atomic ratio of ceria:zirconia is suitably in the range from 10:1 to 1:10, preferably from 5:1 to 1:1, most preferably about 3:1.

Suitably the support material comprises ceria and optionally zirconia dispersed on the surface of a magnesium aluminate material that may be magnesium aluminate alone or may be a mixed magnesium aluminate/magnesium oxide material. The average particle size of the ceria and/or zirconia particles on the surface of the magnesium aluminate material is suitably below 15nm, preferably below 8nm.

The support material of the as-prepared catalyst (before it is used to catalyse a reforming reaction) suitably has a surface area greater than 80m<sup>2</sup>/g and preferably between 100 and 200m<sup>2</sup>/g.

The precious metal particles suitably comprise rhodium, ruthenium or platinum. The precious metal particles may be rhodium, ruthenium or platinum alone, or may be alloy particles comprising one or more of rhodium, ruthenium and platinum. Suitable alloying metals include other precious metals such as palladium, osmium or iridium, but may also include base metals. In a preferred embodiment the precious metal particles are rhodium particles or platinum-rhodium alloy particles. In a particularly preferred embodiment the precious metal particles are rhodium particles.

PFC1683

The precious metal particles are dispersed on the support material. When the support material comprises ceria and optionally zirconia dispersed on a magnesium aluminate material, the precious metal particles may be deposited on the magnesium aluminate material, on the ceria-zirconia particles and/or at the interfaces of the ceria-zirconia and the magnesium aluminate material.

Suitably the loading of the precious metal particles is 0.5-10 weight %, based on the weight of the support material. If the precious metal particles are platinum-rhodium alloy particles, a suitable atomic ratio of platinum:rhodium is between 5:1 and 1:5, preferably about 1:1.

In a preferred embodiment, the reforming catalyst further comprises an alkali metal or alkaline earth metal promoter, preferably lithium. The promoter is deposited on the surface of the support material and is preferably alloyed with the precious metal particles. The atomic ratio of precious metal particles to promoter material is suitably between 20:1 and 5:1.

In another preferred embodiment, the reforming catalyst further comprises gold as a promoter. The gold is suitably not alloyed with the catalytic precious metal particles, but is present as gold particles that are dispersed, with the precious metal particles, on the surface of the support material.

The catalyst may be prepared by any suitable methods known to those skilled in the art. Suitable methods include co-impregnation, deposition precipitation and co-precipitation procedures.

A suitable method for preparing the support material is the deposition of ceria and zirconia onto a magnesium aluminate material by co-precipitation of cerium oxyhydroxide and zirconium oxyhydroxide. The magnesium aluminate material could be magnesium aluminate, or a magnesium aluminate/magnesium oxide mixture produced by calcining aluminium magnesium hydroxycarbonate. Sols of ceria and zirconia, which are stabilised by counter ions such as nitrate and acetate, are added to a slurry of a magnesium aluminate material. A base such as 1M ammonia solution is added to the

PFC1683

5

slurry. The product is then washed several times, dried, e.g. at 120°C and calcined, e.g. at 800°C.

A suitable method for the deposition of the precious metal particles onto the support material is incipient wetness impregnation. Suitable metal salts are made up into a solution such that the volume of solution is sufficient to fill the entire pore volume of the support material. The solution is added to the support material, the material is mixed thoroughly and then dried and calcined.

Another suitable method for the deposition of the precious metal particles is co-deposition. The support material is dispersed in a slurry containing suitable precious metal salts. A base is added to deposit the metal onto the support material, and the catalyst is dried and calcined.

In a further aspect, the present invention provides a catalysed component comprising the reforming catalyst according to the invention. The catalysed component comprises the reforming catalyst deposited on a suitable substrate. The substrate may be any suitable flow-through substrate such as a monolith, foam, static mixer or heat exchanger unit. Alternatively the substrate may comprise discrete units such as pellets, rings etc. which are enclosed in a container. The substrate may be ceramic, e.g. cordierite, or metallic. The amount of catalyst on the substrate is suitably from 0.5-5g/in<sup>3</sup> (0.03-0.3g/cm<sup>3</sup>).

The catalyst is deposited on the substrate using any appropriate techniques known to those skilled in the art. Suitably, the catalyst is dispersed in water, possibly with additional binders, thickeners or adhesive agents to form a slurry. It is usually necessary to break down the particle size of the catalyst by milling the slurry, e.g. in a ball mill or a bead mill, or by milling the dry catalyst before it is added to the slurry, e.g. in a jet mill. The slurry is passed over or through the substrate to coat the surfaces that will be exposed to the reactant gases. This can be done by dip coating, flood coating or waterfall coating. These and other methods, such as vacuum impregnation, are well known in the art. Any excess slurry is removed, and the substrate is subsequently dried and calcined.



PFC1683

In a yet further aspect, the present invention provides a process for reforming fuel using a catalysed component according to the invention. The process comprises the step of supplying fuel, steam and optionally air to the catalysed component. The fuel may be an alkane such as methane, an alcohol such as methanol or a mixture of components, such as gasoline. Liquid fuels must be vaporised before they are supplied to the catalysed component. If the process uses steam reforming (and not autothermal reforming), heat must be supplied to the reaction or to the catalysed component, e.g. by pre-heating the fuel and/or steam. The reforming process is typically carried out at temperatures above 600°C.

In a yet further aspect, the present invention provides a fuel processing system comprising a catalysed component according to the invention. The system may further comprise carbon monoxide clean-up components (e.g. water gas shift reactors, selective oxidation reactors, hydrogen diffusion membranes), heat exchanger components and catalytic burners.

The invention will now be described by reference to examples which are not meant to be limiting thereof.

### Catalyst Manufacture

Five catalysts with five different support materials were prepared:

	Support Material	MgO:MgAl <sub>2</sub> O <sub>4</sub> molar ratio
Comparative Example 1	30wt% ceria/zirconia on Al <sub>2</sub> O <sub>3</sub>	N/A
Example 1	30wt% ceria/zirconia on calcined Pural MG30	11.80
Example 2	30wt% ceria/zirconia on calcined Pural MG50	0.65
Example 3	30wt% ceria/zirconia on calcined Pural MG70	0.20
Example 4	30wt% ceria/zirconia on MgAl <sub>2</sub> O <sub>4</sub>	N/A

PFC1683

7

The alumina, Pural materials and magnesium aluminate were purchased from Sasol GmbH (Brunsbuttel, Germany). The Pural materials are aluminium magnesium hydroxycarbonates and the MG30, MG50 and MG70 materials have metal contents equivalent to 30:70, 50:50 and 70:30 weight mixtures of MgO and Al<sub>2</sub>O<sub>3</sub>. The Pural materials were calcined at 800°C to form mixtures of MgO and MgAl<sub>2</sub>O<sub>4</sub>. X-ray diffraction confirmed that the calcined materials contained only crystalline MgO (periclase structure) and crystalline MgAl<sub>2</sub>O<sub>4</sub> (spinel structure). The MgO:MgAl<sub>2</sub>O<sub>4</sub> molar ratio was calculated from the known amounts of magnesium and aluminium in the starting materials.

The alumina, calcined Pural and magnesium aluminate materials were slurried in demineralised water and nitrate-stabilised ceria and zirconia sols were added. Ammonia solution (1M) was added until the pH of the slurry reached 8. The product was filtered and washed several times to remove NH<sub>4</sub>NO<sub>3</sub> and then dried at 120°C for 8 hours and calcined at 800°C for 2 hours. Each of the support materials had a ceria-zirconia loading of 30wt%.

A rhodium loading of 2wt% was deposited on each support material by incipient wetness impregnation. Rhodium nitrate (Johnson Matthey, UK) was made up into an aqueous solution such that the volume of solution was sufficient to fill the entire pore volume of the support material. The solution was added to the support material, the material was mixed and then the material was dried at 120°C for 8 hours and calcined at 500°C for 2 hours.

### Performance Tests

Catalyst powder samples were diluted with cordierite (10:1 cordierite:catalyst) and pelletised (250-355µm). 100mg of the pelletised samples were tested in a continuous flow, fixed-bed microreactor.

Gasoline steam reforming performance of the catalysts was measured at atmospheric pressure and a furnace temperature of 700°C. The fuel flow was 1.9 ml/h and the H<sub>2</sub>O:C ratio was 4. Nitrogen was used as a diluent at 100ml/min.

PFC1683

8

Conversion to CO, CO<sub>2</sub> and CH<sub>4</sub> and the NMHC level (residual non-methane hydrocarbon as C1 equivalents in dry gas flow) were measured. The NMHC level is considered to be a more sensitive indicator of performance than conversion to C1 components. Lower NMHC levels indicate better performance.

	% Conversion to CO+CO <sub>2</sub> +CH <sub>4</sub>	NMHC/ppm
Comparative Example 1	71.9	51150
Example 1	93.1	11760
Example 2	94.1	9600
Example 3	87.8	21390
Example 4	87.9	20280

The catalysts of the invention have better performance than a state-of-the-art catalyst with an alumina support (comparative example 1).

PFC1683

9

**CLAIMS**

1. A reforming catalyst comprising precious metal particles dispersed on a support material, wherein the support material comprises ceria, and characterised in that the support material further comprises magnesium aluminate and/or magnesium oxide.
2. A reforming catalyst according to claim 1, wherein the support material contains at least 20wt% magnesium aluminate and/or magnesium oxide.
3. A reforming catalyst according to claim 1 or claim 2, wherein the support material comprises magnesium aluminate and magnesium oxide.
4. A reforming catalyst according to claim 3, wherein the molar ratio of magnesium aluminate to magnesium oxide is between 15:1 and 1:15.
5. A reforming catalyst according to claim 3 or claim 4, wherein the support material is made by a process wherein aluminium magnesium hydroxycarbonate is calcined to form a mixture of magnesium oxide and magnesium aluminate.
6. A reforming catalyst according to any preceding claim, wherein the support material further comprises zirconia.
7. A reforming catalyst according to any preceding claim, wherein the support material comprises ceria and optionally zirconia dispersed on the surface of magnesium aluminate or a mixed magnesium aluminate/magnesium oxide material.
8. A reforming catalyst according to any preceding claim, wherein the precious metal particles suitably comprise rhodium, ruthenium or platinum.
9. A catalysed component comprising a reforming catalyst according to any one of claims 1 to 8 deposited on a substrate.
10. A process for reforming fuel using a catalysed component according claim 9.

PFC1683

10

11. A fuel processing system comprising a catalysed component according claim 9.

PFC1683

11

**REFORMING CATALYST****Abstract of the Invention**

A reforming catalyst comprising precious metal particles dispersed on a support material, wherein the support material comprises ceria, and characterised in that the support material further comprises magnesium aluminate and/or magnesium oxide is disclosed. Catalysed components and fuel processing systems comprising the catalyst, and reforming processes using the catalyst are also disclosed.